Instructions for use

WATER TESTER

Product parameter	
Feature	TDS/EC/PH/SALT
TDS value Water purity	Range:0-9990ppm 10-200ppt Resolution:1ppm/ppt Accuracy:±2%
PH	Range :0.01-14pH Resolution: 0.01pH Accuracy :±0.05pH
Electric conductivity	Range:0-9999us/cm 10-200ms/cm Resolution:1us/cm Accuracy:±2%
SALT	Range :0-25% Resolution:0.01%
Battery	3.2V 600mAh (Lithium battery)
Dimension	181x44x38mm
Weight	118g
Data lock	Automatic locking
Automatic shutdown	None 8 minutes
Warranty period	6 months




Matters needing attention

1. the factory has been calibrated, can be used directly
2. Shake the probe to ensure that there are no bubbles around the electrode
3. After measuring, rinse the electrode with clean water and keep it dry
4. the use of mobile phone charger, can be repeated about 300 times
5. Disassembly without permission is not covered by warranty


Guangzhou Jia Bei water treatment Co., LTD
Address: No. 13, Daxiang Street, Xinshuikeng Village, Dalong Street, Panyu District, Guangzhou
Tel :020-85542368 180 2234 2420
020-85821510 180 2234 2410
Email :100@jubway.com
200@jubway.com

Instructions for use

一、 Press the ON/OFF keytostart

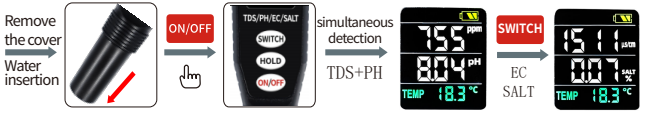

二、Press the HOLD keyto lock the value

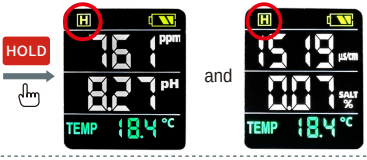

Testing items and units	
tds	ppm and ppt
PH	pH
EC	us/cm and ms/cm
SALT	%

The probe is consumable;
You can scan the QR code below for consultation and purchase.




四、long press the 6-second SWITCH key to enter the calibration mode
(scan the following QR code and ask the manufacturer for calibration video)

1.TDS /Conductivity /Salinity calibration
(calibrated at the factory)
If you need to calibrate,
you need to return to the factory for processing
2.PH calibration
(calibrated at the factory)
If you need to calibrate, scan the QR code on the right

After-sales service wechat

Charging operation

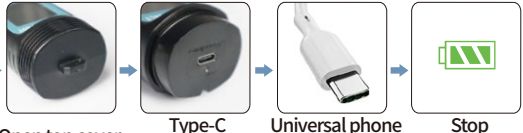

Open top cover | Type-C charging port | Universal phone charging cable | Stop when full