Product parameter

Feature	TDS/EC/TEMP
TDS value Water purity	Range:0-9990ppm Resolution:1ppm Accuracy:±2%F.S
Electric conductivity	Range:0-9990us/cm Resolution:1us/cm Accuracy:±2%F.S
Temperature	0-60°C ; 32.1-140.0°F
Battery	3.2V 600mAh (Lithium battery)
Dimension	181x44x38mm
Weight	106g
Data lock	locking
Automatic shutdown	8 minutes
Warranty period	6 months

Matters needing attention

1. the factory has been calibrated, can be used directly
2. Shake the probe to ensure that there are no bubbles around the electrode
3. After measuring, rinse the electrode with clean water and keep it dry
4. the use of mobile phone charger, can be repeated about 300 times
5. Disassembly without permission is not covered by warranty

WATER TESTER

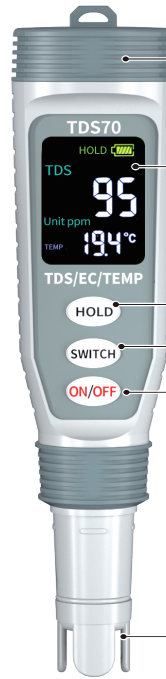

Guangzhou JUBWAY Technology Co., LTD
Address: No. 13, Daxiang Street, Xinshuikeng Village, Dalong Street, Panyu District, Guangzhou
Tel :020-85542368 180 2234 2420
020-85821510 180 2234 2410
Email :100@jubway.com
200@jubway.com

Instructions for use

一、Press the ON/OFF keytostart



Testing items and units	
TDS	ppm
EC	μs/cm
TEMP	°C/°F

二、Press the SWITCH keyto lock the value



三、Press the HOLD keyto lock the value



The probe is consumable;
You can scan the QR code below for consultation and purchase.



四、long press the 6-second SWITCH key to enter the calibration mode

(scan the following QR code and ask the manufacturer for calibration video)

1.TDScalibration
(calibrated at the factory)
If you need to calibrate,
you need to return to the factory for processing
2.ECcalibration
(calibrated at the factory)
If you need to calibrate, scan the QR code on the right



After-sales service wechat

Charging operation



Open top cover | Type-C charging port | Universal phone charging cable | Stop when full